

LED Wallwash

A76



For use in H09 and H10 ALS systems.

Specify:

A76 - [] - [] - [] - [] - []

FIXTURE MODEL LUMENS ADAPTER VOLTAGE CRI CCT FINISH

Example:

A76 L1800 BT A 92 30 MB

This Litelab fixture features an ultra-high-efficiency LED allows maximum light output from a small fixture. The CREE CXB engine is available in an architectural range of color temperatures and produces high CRI and R9 values.

LUMEN	OPTIONS	CRI/CCT	COLOR TEMP OPTIONS	INPUT REQUIREMENTS
L1800	1800 Lumens	92 27	92 CRI/2700K	120VAC/0.19A/23W
	1800 Lumens	92 30	92 CRI/3000K	120VAC/0.19A/23W
	1800 Lumens	92 35	92 CRI/3500K	120VAC/0.19A/23W
L1300	1300 Lumens	92 27	92 CRI/2700K	120VAC/0.12A/15W
	1300 Lumens	92 30	92 CRI/3000K	120VAC/0.12A/15W
	1300 Lumens	92 35	92 CRI/3500K	120VAC/0.12A/15W
L1000	1000 Lumens	92 27	92 CRI/2700K	120VAC/0.09A/12W
	1000 Lumens	92 30	92 CRI/3000K	120VAC/0.09A/12W
	1000 Lumens	92 35	92 CRI/3500K	120VAC/0.09A/12W

Features & Benefits

Fixture Description

Single piece die-cast aluminum fixture body allows for high efficiency passive cooling. Deep regressed LED and optic designed for maximum glare control. Fixture to be supplied with baffle, accessory holder and OL-55x75 wallwash spread lens.

Accessory Cartridge

Holds up to two accessories—including a range of lenses, filters and louvers.

Lenses & Accessories**



Standard wallwash spread lens included with fixture. Accessory code shall be "g."

Finishes



Available in white, black and custom finish.

Dimming

This fixture is provided with an LED Driver suitable for trailing edge dimming. Dimming performance may vary based on dimmer model or system being used. If exact performance is required, Litelab recommends testing the Litelab fixture and specified dimmer.

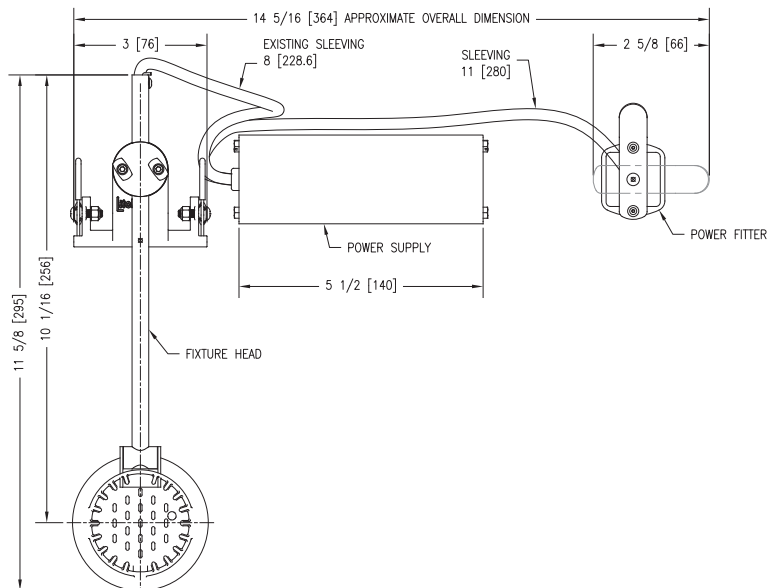
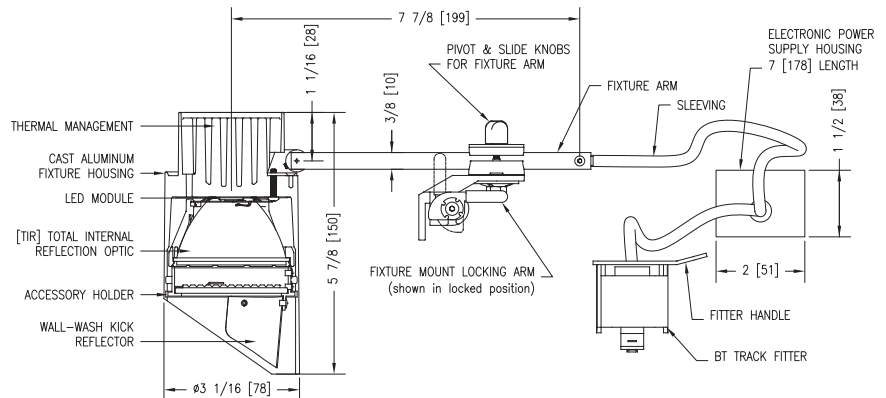


A76 Fixture shown in H09 Housing

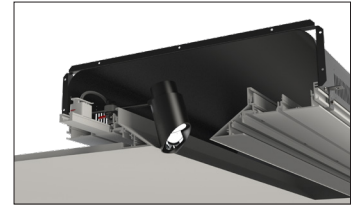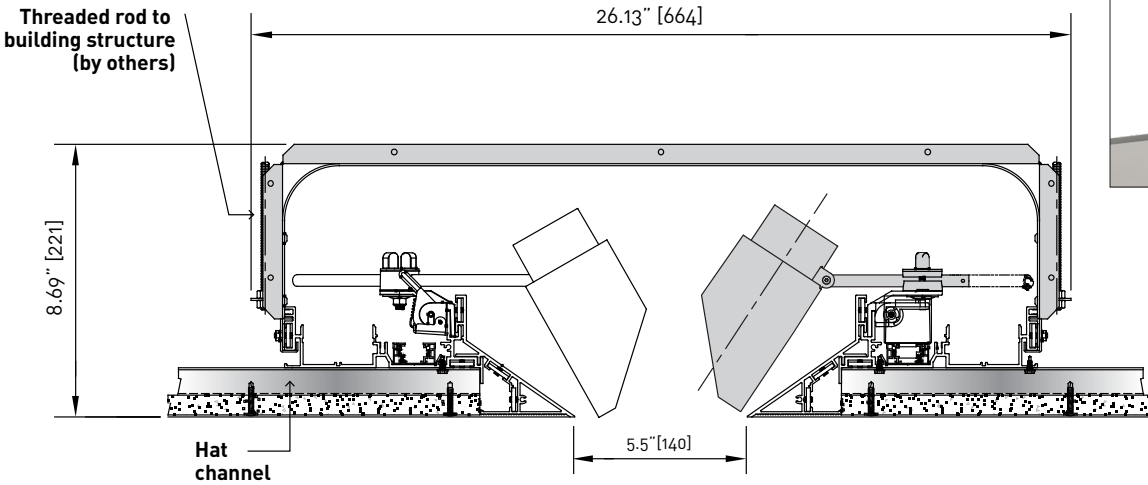

A76 fixture shown in H09 housing.

A76 Fixture shown in H10 Housing

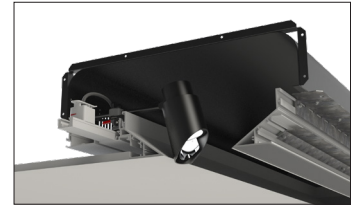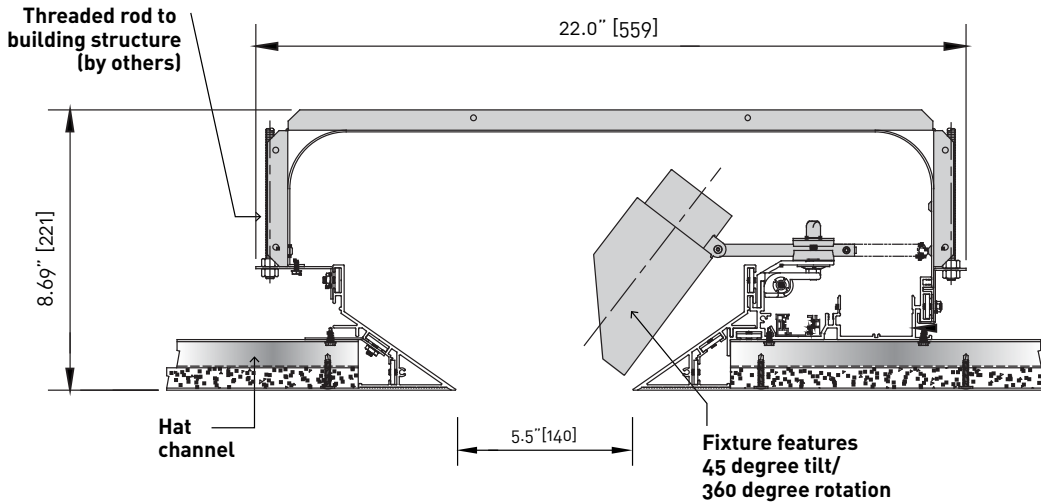

A76 fixture shown in H10 housing.

ACCESSORIES

Spread Lenses

Universal Spread

OL- 55° x 75°-g

Screens

Light Block Screen

B-15N/g

Photo-etched, 15% light-blocking screen. Accepts up to 5 for 30%, 45%, 60% or 75% (maximum)

FINISHES

Consult with Litelab for other finishes

- P** White
- MB** Black
- CP** Custom Finish