


Extrusion Profile:
BUS-08


Mounting Condition:
Wall (W)



Mounting Rules

- 12" [300]** A support point must be provided within 12" of every end or corner of the BusRun layout.
- 3'-0" [915]** Maximum distance between support points cannot exceed 3'-0" linear feet of 'surface' BusRun Busway.
- 3" [76]** Support points cannot be within 3" from the centerline on both sides of BusRun joints.
- 100lb [45kg]** BusRun Busway and mounting hardware are rated for a total supported weight up to 100lbs [45kg] between Support points.


Mounting Options



Wall Mount Bar

Aluminum bracket attaches to BusRun top channel 7/8" x 2.75" [23x70]
Maximum spacing 3'-0" [915].


40130 - for One Channel Bus



Horizontal Wall Mount Bar

Aluminum bracket attaches to BusRun top channel 7/8" x 2.75" [23x70]
Maximum spacing 3'-0" [915].
(Optional, ordered separately)

40133-01 for One Channel Bus




L-Bracket

Aluminum bracket attaches to top of BusRun channel for mounting to soffit or beam 1-3/16" x 2.0" [30x51]
Maximum spacing 3'-0" [915].


64652-KIT - for One Channel Bus

Mounting Diagram

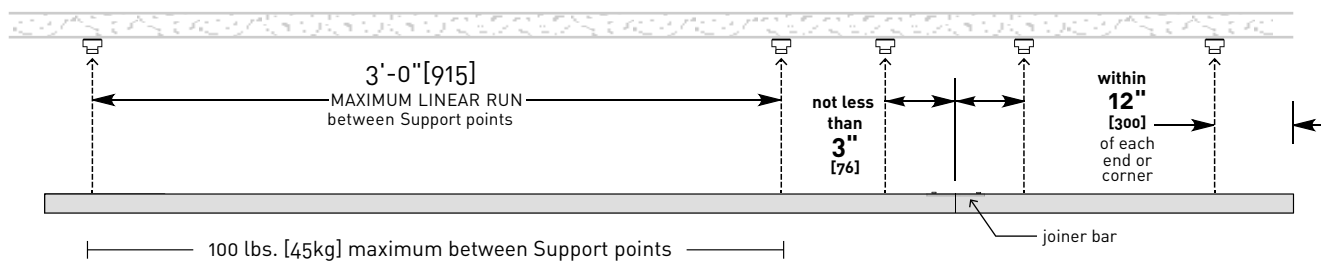

Extrusion Profile:
BUS-08

Mounting Condition:
Wall (W)



Feed Options


- EEF-08W**
- EEC-08W (CL)**



End End Feed:
Whip Style
1/2" NPSM or 20mm
end conduit

Max Load
60 amp at 12v, 120v,
240v, 277v


- TEF-08W**
- TEC-08W (CL)**



Top End Feed:
Whip Style
1/2" NPSM or 20mm
top conduit

Max Load
60 amp at 12v, 120v,
240v, 277v


- SEF-08W**
- SEC-08W (CL)**



Side End Feed:
1/2" NPSM or 20mm
side conduit

Max Load
60 amp at 12v, 120v,
240v, 277v


- EEB-08W**



End End Feed:
Splice Box Style
1/2" NPSM or 20mm
end conduit

Max Load
30 amp at 120v, or
16 amp at 240v


- TEB-08W**



Top End Feed:
Splice Box Style
1/2" NPSM or 20mm
top conduit

Max Load
30 amp at 120v, or
16 amp at 240v


- TCB-08W**



Top Center Feed:
Splice Box Style
1/2" NPSM or 20mm
top conduit

Max Load
30 amp at 120v, or
16 amp at 240v

- TCF-08W**



Top Center Feed:
Whip Style
1/2" NPSM or 20mm
top conduit

Max Load
60 amp at 12v, 120v,
240v, 277v

Notes:

1. All Splice Box feeds are 30 amp max load.
2. All feeds are supplied with two end caps.
3. Feeds cannot be modified.
4. Feeds can be made 10" to 120" long.